


FEATURES

- Low Leakage
- Low forward voltage drop
- High current capability
- High forward surge current capacity

MECHANICAL DATA

- Technology: Cell with vacuum soldered
- Case: transfer molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Plated lead , solderable per MIL-STD-202E method 208C
- Polarity: Color ring denotes cathode end
- Mounting Position: any
- Weight: 0.083 ounces, 2.32 grams

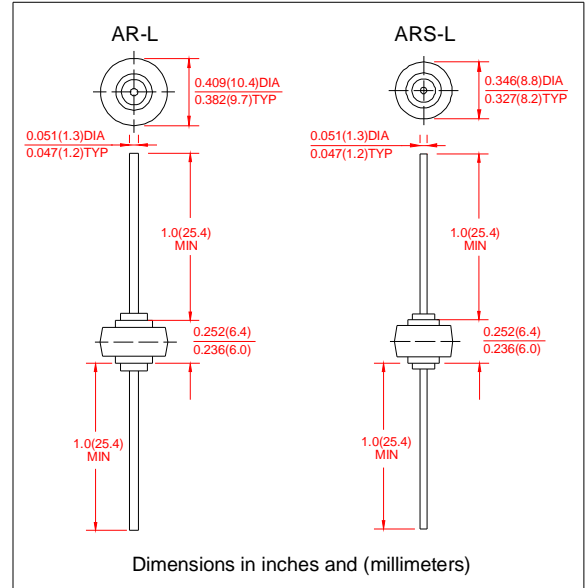


MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60HZ, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	ARL3505 ARSL3505	ARL351 ARSL351	ARL352 ARSL352	ARL354 ARSL354	ARL356 ARSL356	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	Volts
Maximum Average Forward Rectified Current, At $T_c=110^{\circ}C$	I_O	35.0					Amps
Peak Forward Surge Current 3.3mS single half sine wave superimposed on Rated load (JEDEC method)	I_{FSM}	500					Amps
Rating for fusing ($t < 8.3ms$)	I^2t	1038					A^2S
Maximum instantaneous Forward Voltage at 80A	V_F	1.08					Volts
Maximum DC Reverse Current at Rated $T_A=25^{\circ}C$	I_R	5.0					UA
DC Blocking Voltage per element $T_A=100^{\circ}C$		250					
Typical Thermal Resistance	$R_{\theta JC}$	1.0					$^{\circ}C/W$
Operating and Storage Temperature Range	T_J, T_{STG}	(-65 to +175)					$^{\circ}C$
Polarity and voltage demotion color band		Red	Yellow	Silver	Green	Green	


F1G.1 TYPICAL FORWARD CURRENT DERATING CURVE

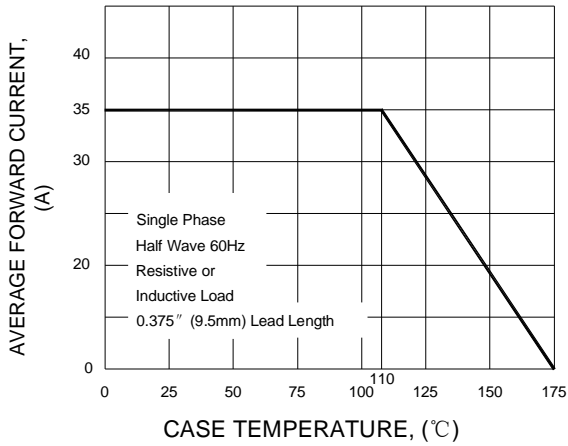

F1G.2 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

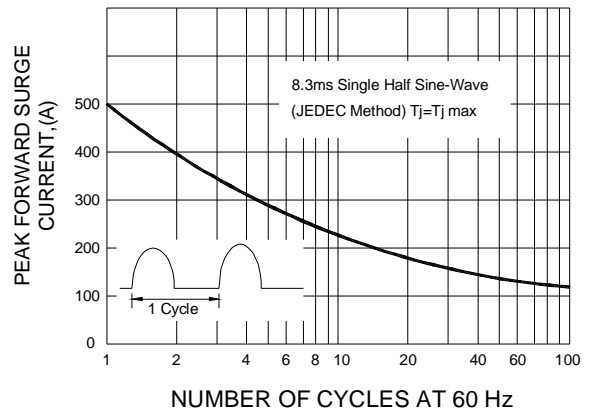

F1G.3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

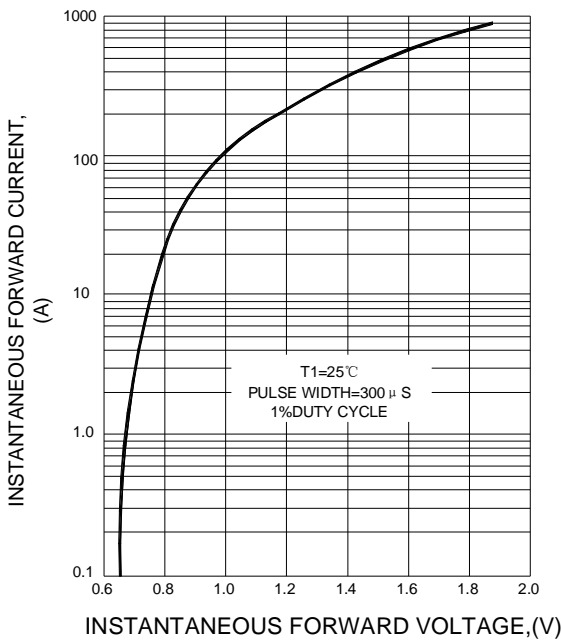

F1G.4 FORWARD POWER DISSIPATION

