

CURRENT 1.0 Ampere
 VOLTAGE RANG 50 to 1000 Volts


FR101 THRU FR107

FEATURES

- Low coat construction
- Fast switching for high efficiency.
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
 260°C/10 secods/.375”(9.5mm)lead length at 5 lbs(2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.012 ounce, 0.33 grams

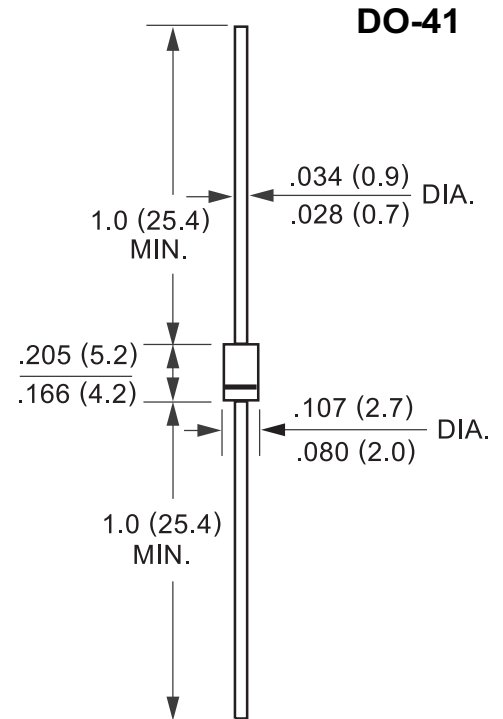

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified
 Single Phase, half wave, 60Hz, resistive or inductive load
 For capacitive load derate current by 20%

	SYMBOLS	FR101	FR102	FR103	FR104	FR105	FR106	FR107	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current 0.375”(9.5mm) lead length at T _A = 75°C	I _(AV)	1.0							Amp
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I _{FSM}	30							Amps
Maximum Instantaneous Forward Voltage @ 1.0A	V _F	1.2							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	I _R	T _A = 25°C							μA
		T _A = 100°C							
Maximum Reverse Recovery Time (Note 3) T _J =25°C	t _{rr}	150				250	500		ns
Typical Junction Capacitance (Note 1)	C _J	15							pF
Typical Thermal Resistance (Note 2)	R _{θJA}	50							°C/W
Operating Junction Temperature Range	T _J	(-55 to +150)							°C
Storage Temperature Range	T _{STG}	(-55 to +150)							°C

Notes:

- Measured at 1.0MHz and Applied Reverse Voltage of 4.0Volts.
- Thermal Resistance from junction to Ambient at .375”(9.5mm)lead length, P.C.board mounted.
- Reverse Recovery Test Conditions: I_F=0.5A, I_R=1.0A, I_{rr}=0.25A

CURRENT 1.0 Ampere
 VOLTAGE RANG 50 to 1000 Volts

FR101 THRU FR107

RATING AND CHARACTERISTIC CURVES FR101 Thru FR107

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

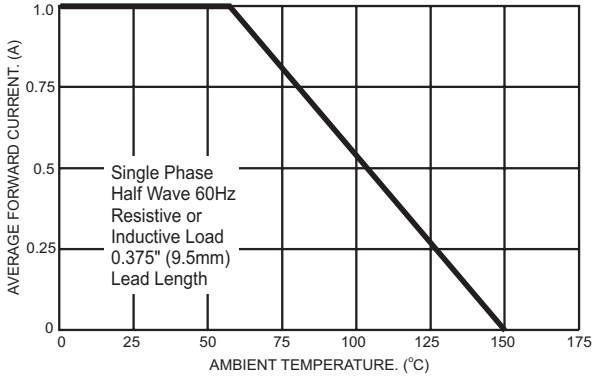


FIG.2- TYPICAL REVERSE CHARACTERISTICS PER LEG

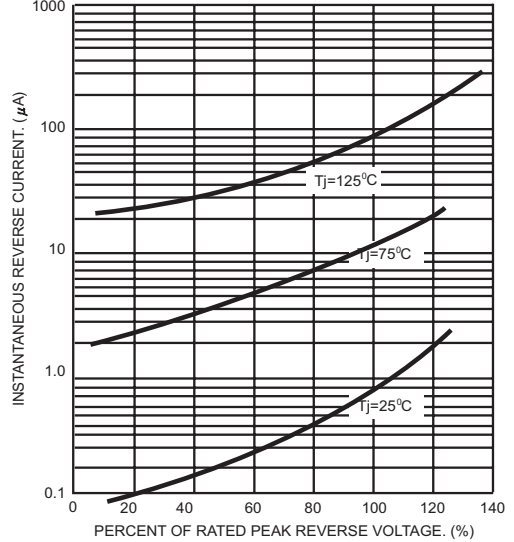


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

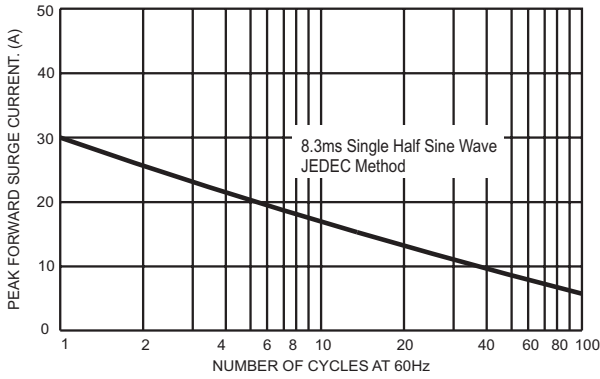


FIG.5- TYPICAL FORWARD CHARACTERISTICS

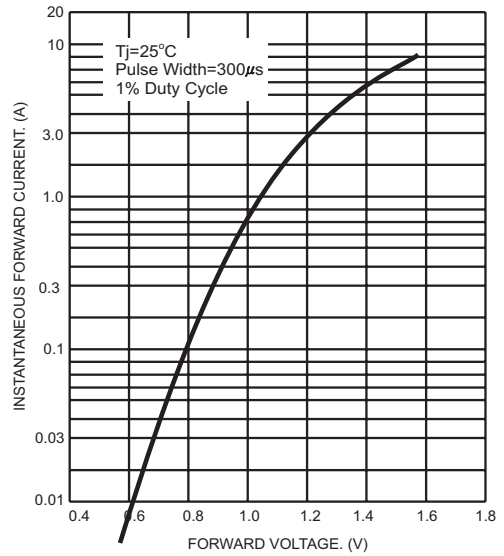


FIG.4- TYPICAL JUNCTION CAPACITANCE

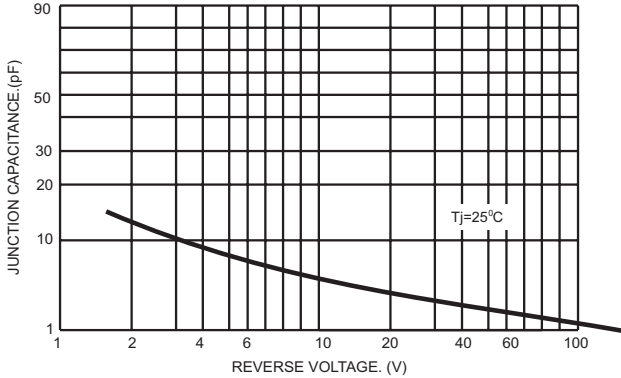


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

