

CURRENT 8.0 Ampere
 VOLTAGE RANG 20 to 100 Volts

SS82C THRU SS810C


FEATURES

- ▶ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ▶ For surface mounted applications
- ▶ Low reverse leakage
- ▶ Built-in strain relief, ideal for automated placement
- ▶ High forward surge current capability
- ▶ High temperature soldering guaranteed: 250°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AB molded plastic body
 Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
 Polarity: Color band denotes cathode end
 Mounting Position: Any
 Weight: 0.007 ounce, 0.25grams

DO-214AB/SMC

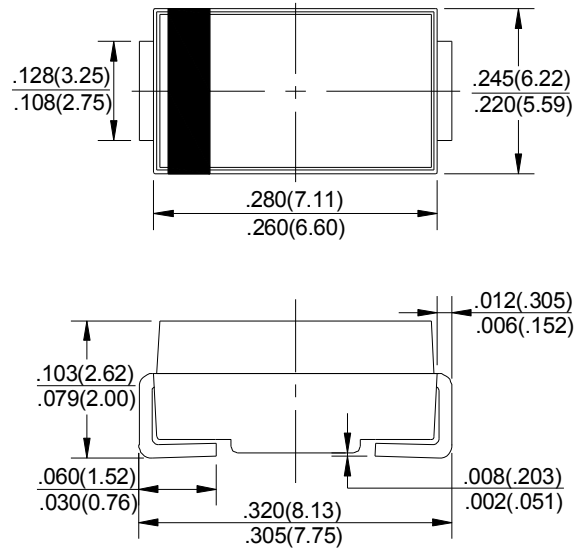

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Catalog Number	SYMBOLS	SS82	SS83	SS835	SS84	SS845	SS86	SS88	SS810	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	35	40	45	60	80	100	VOLTS
Maximum RMS voltage	V_{RMS}	14	21	24.5	28	31.5	42	56	70	VOLTS
Maximum DC blocking voltage	V_{DC}	20	30	35	40	45	60	80	100	VOLTS
Maximum average forward rectified current at $T_L = 95^\circ\text{C}$	$I_{(AV)}$	8.0								Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	200.0								Amps
Maximum instantaneous forward voltage at 8.0A	V_F	0.65						0.85		Volts
Maximum DC reverse current $T_A = 25^\circ\text{C}$ at rated DC blocking voltage $T_A = 100^\circ\text{C}$	I_R	1								mA
		20								
Typical junction capacitance (NOTE 1)	C_J	400								pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	18.0								$^\circ\text{C/W}$
Operating junction temperature range	T_J	-50 to +150								$^\circ\text{C}$
Storage temperature range	T_{STG}	-50 to +150								$^\circ\text{C}$


Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
 2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

CURRENT 8.0 Ampere
 VOLTAGE RANG 20 to 100 Volts

SS82C THRU SS810C


RATING AND CHARACTERISTIC CURVES SS82 Thru SS810

Figure 1
 Typical Forward Characteristics

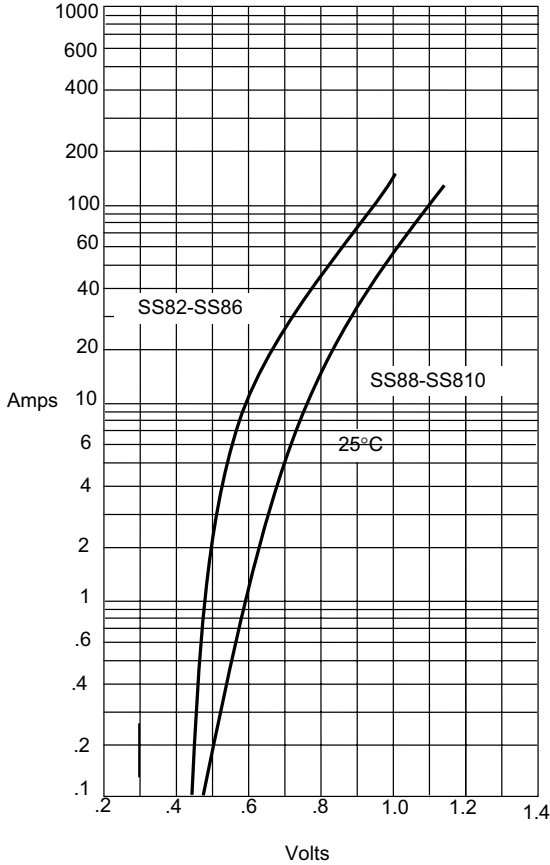


Instantaneous Forward Current - Amperes versus
 Instantaneous Forward Voltage - Volts

Figure 2
 Forward Derating Curve

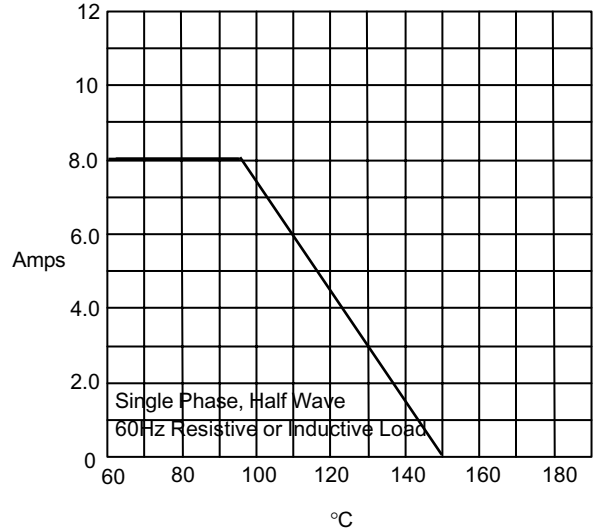

Average Forward Rectified Current - Amperes versus
 Junction Temperature - °C

Figure 3
 Junction Capacitance

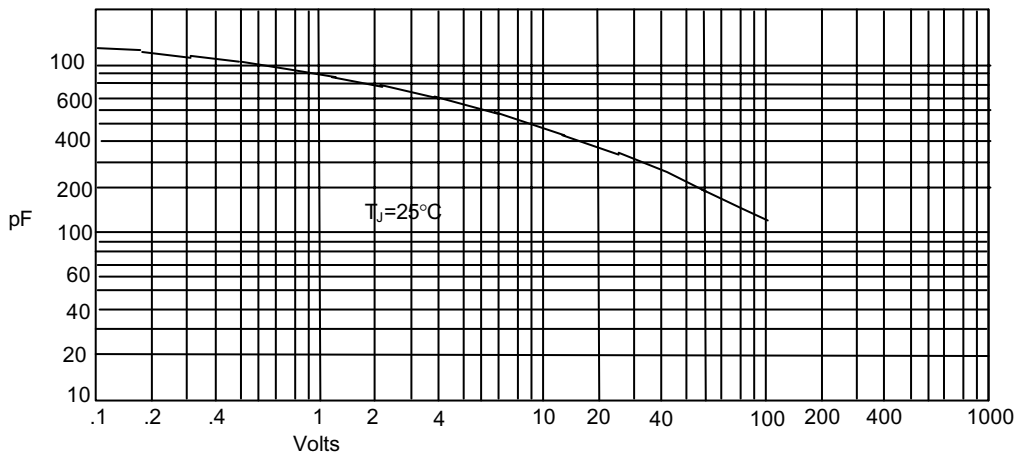


Junction Capacitance - pF versus
 Reverse Voltage - Volts

CURRENT 8.0 Ampere
 VOLTAGE RANG 20 to 100 Volts

SS82C THRU SS810C


RATING AND CHARACTERISTIC CURVES SS82 Thru SS810

Figure 4
 Typical Reverse Characteristics

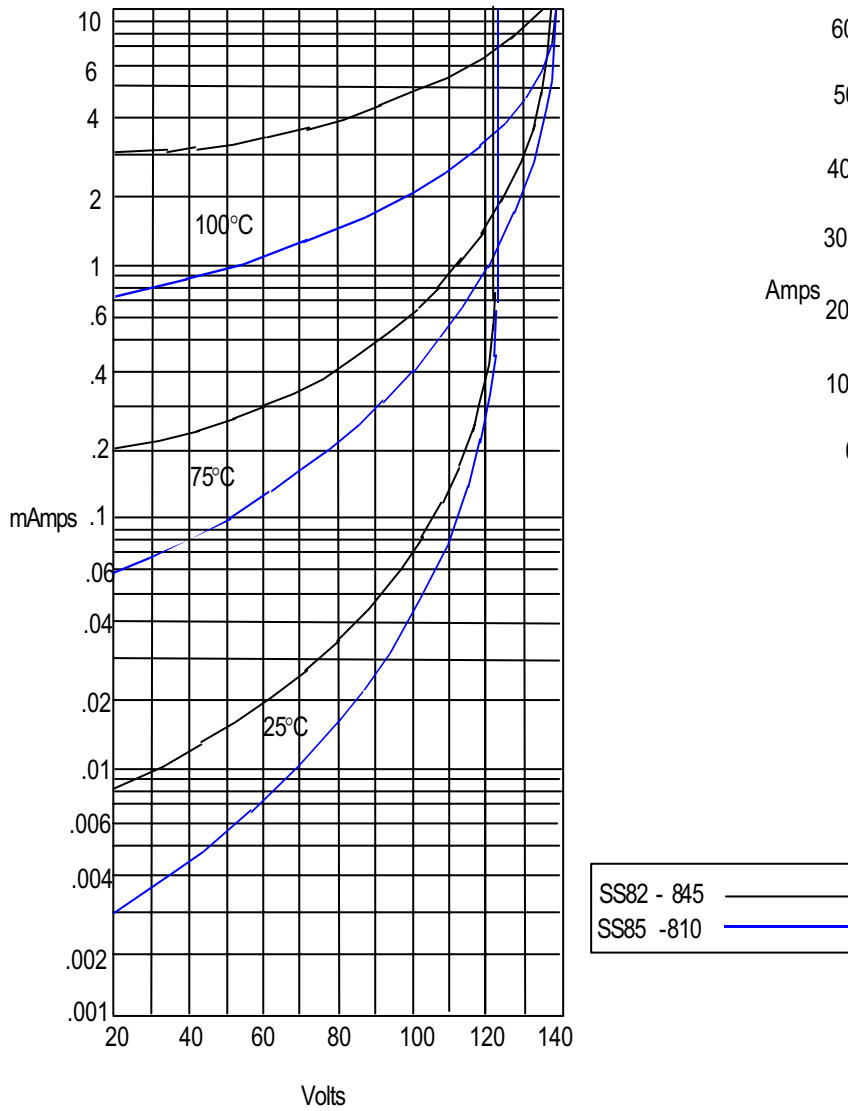

Instantaneous Reverse Leakage Current - MicroAmperes versus
 Percent Of Rated Peak Reverse Voltage - Volts

Figure 5
 Peak Forward Surge Current

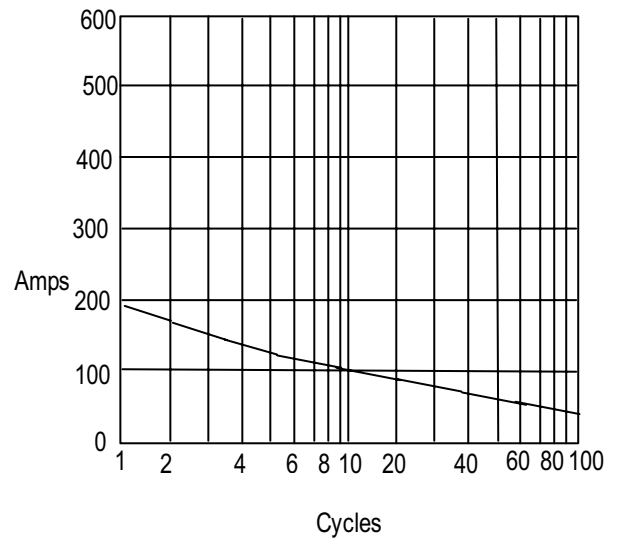

Peak Forward Surge Current - Amperes versus
 Number Of Cycles At 60Hz - Cycles